




Ref. 1430/1450
Microfresa para
fresados profundos





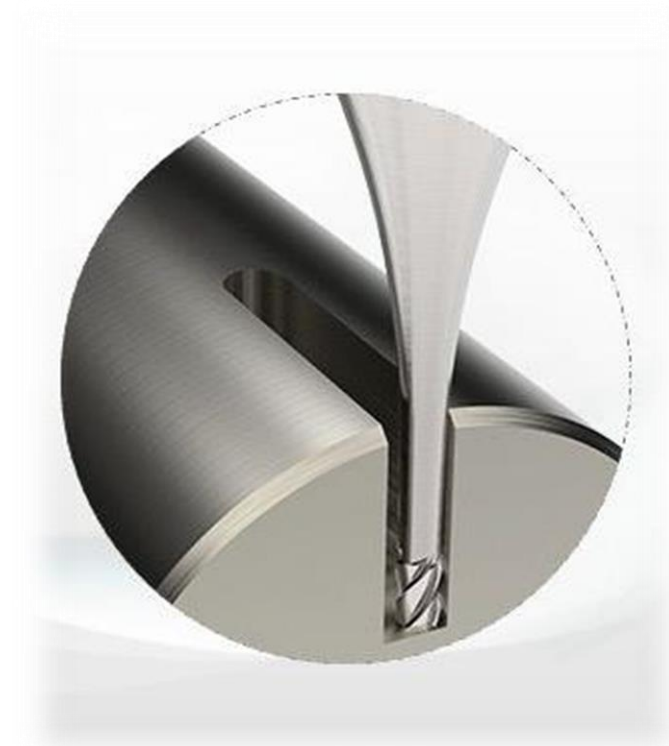

- « No hay rebabas »
- « Acabado superficial impecable »
- « **Mejor rendimiento** »



Ref 1450 Ø 0.5 mm

	Vc [m/min]	N [tr/min]	F _z [mm]	F [mm/min]
Stainless steel	50	32'000	0.003	385
Titanium	50	32'000	0.003	385
Cobalt chrome	100	64'000	0.003	770

1430

REF 1430

Art. n°	d ₁	l ₁	l ₂	D	L	Z
1430d0.20	0.20	0.30	0.60	3.0	38	3
1430d0.25	0.25	0.38	0.75	3.0	38	3
1430d0.30	0.30	0.45	0.90	3.0	38	3
1430d0.35	0.35	0.52	1.05	3.0	38	4
1430d0.40	0.40	0.60	1.20	3.0	38	4
1430d0.45	0.45	0.68	1.35	3.0	38	4
1430d0.50	0.50	0.75	1.50	3.0	38	4
1430d0.60	0.60	0.90	1.80	3.0	38	4
1430d0.70	0.70	1.05	2.10	3.0	38	4
1430d0.80	0.80	1.20	2.40	3.0	38	4
1430d0.90	0.90	1.35	2.70	3.0	38	4
1430d1.00	1.00	1.50	3.00	3.0	38	4

x 3



Available
uncoated or coated



Z3-4



**λ
45°**

**Υ
14°**

CARB



pas=0.8xd₁

ae=0.25xd₁
ap=1xd₁

1450

REF 1450

Art. n°	d ₁	l ₁	l ₂	D	L	Z
1450d0.20	0.20	0.30	1.00	3.0	38	3
1450d0.25	0.25	0.38	1.25	3.0	38	3
1450d0.30	0.30	0.45	1.50	3.0	38	3
1450d0.35	0.35	0.52	1.75	3.0	38	4
1450d0.40	0.40	0.60	2.00	3.0	38	4
1450d0.45	0.45	0.68	2.25	3.0	38	4
1450d0.50	0.50	0.75	2.50	3.0	38	4
1450d0.60	0.60	0.90	3.00	3.0	38	4
1450d0.70	0.70	1.05	3.50	3.0	38	4
1450d0.80	0.80	1.20	4.00	3.0	38	4
1450d0.90	0.90	1.35	4.50	3.0	38	4
1450d1.00	1.00	1.50	5.00	3.0	38	4

x 5

